

## **Drawing of waste water treatment plant**

## BioCleaner® BC 6 PP



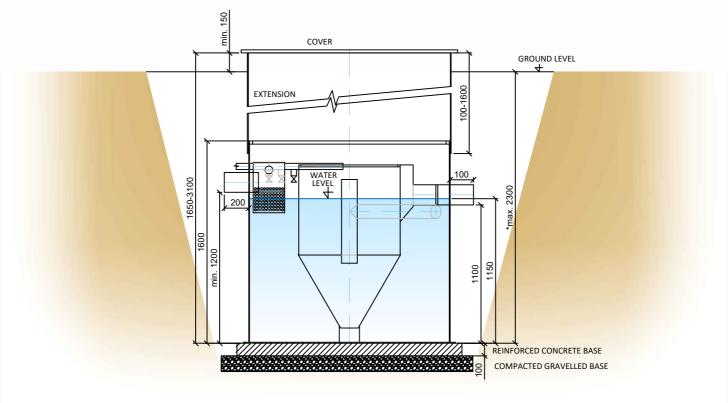

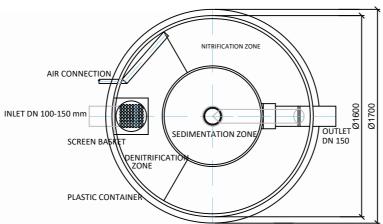

Note: Drawing of WWTP for backfill or concreeting. Assembly make according to the Instruction for installation. \* In case the WWTP has to be instaled deeper than maximal allowed dimension (see the drawing) or the soil load around the WWTP or underground water level i higher then we strongly recommend statically secure the WWTP tank (e.g. concreeting).

Volume of denitrification zone	0.50 m <sup>3</sup>	Maximum weight	165 kg
Volume of nitrification zone	1.18 m³	Installed power	50 W
Volume of sedimentation zone	0.63 m <sup>3</sup>	Voltage	230 V
Total volume	2.31 m <sup>3</sup>	Protection of supply cable	4 A
Water level	1.15 m	Supply cabel	CYKY-J 3x2.5







Head office & production

Wilsonova 420

392 01 Soběslav



ENVI-PUR, s.r.o.